



Hard Metal Agitator Slurry Pumps



KZN & KZNR Series

KZN Series Hard Metal Agitator Slurry Pumps

BJM Pumps® is the top choice for the most difficult slurry, sand and sludge pumping applications. Our KZN pumps are among our most popular pumps as they are engineered specifically for the tough applications you deal with in:

- Mining/Coal Mining
- Hydraulic Fracking
- Mineral Processing
- Steel Production
- Drilling Mud Transfer
- Slurry Transfer
- Sand and Gravel
- Lime Slurry
- Fly Ash

Our durable pumps are built to keep your production running to save you maintenance, repair, labor and downtime costs. To learn more about getting “The Pump you Need, Guaranteed™” visit www.flowsolutions.com or call 860-399-5937.



Key Benefits of KZN

Abrasion-Resistant 28% Chrome Iron (600 Brinell, 57 Rockwell C) Components

Agitator: Keeps solids from settling at the bottom to prevent clogging

Wear Plate: Easily replaceable to keep pump performing like new longer

Impeller: Slurry-type, semi-open design handles the most abrasive slurries

Superior Protection

Class H motor insulation with integral amperage (FLA) and temperature overload protection

Double silicon carbide mechanical seals in a separate oil-filled seal chamber

Heavy duty lip seal to protect seal chamber from solids migration

Hardened ductile iron volute with 300 Brinell hardness for twice the abrasion resistance of standard ductile iron

Top Discharge Design

Portability and Durability: KZN pumps are not easily damaged when moved from one project to another and pushed/pulled into place

Cooled by Pumped Liquids: KZN pumps can remove liquids to within inches of the bottom while side discharge pumps leave up to three feet of liquid because it must remain submerged to avoid overheating

Slim Design: The largest KZN model has a maximum 22.75-inch diameter, making it fit in tighter spaces than side discharge pumps



KZNR Series Severe Duty Slurry Pumps

Some slurry solids are so abrasive that pump service life depends on an extremely hardened casting. BJM Pumps® KZNR Series pumps offer this level of casting through a proprietary process that hardens the ductile iron volutes to 71 Rockwell C (compared to Class 30 ductile iron for the KZN Series). The KZNR Series are severe duty slurry pumps that can stand up to extreme abrasiveness. For complete specifications, visit www.flowsolutions.com or call 860-399-5937.

Features

50-Ft. Power Cable

UL/CSA/MSHA-approved cable with custom length and optional Seal Minder® available

Cable Entry Sealing System

FKM compression fitting with SS gland nut and seal cable. Individually isolated and potting power leads to prevent wicking

Heavy Duty Lifting Rings

To lift & transport the pump easily

NPT discharge

Hose barb fittings or cam-lock fittings available

Hardened Ductile Top Discharge Motor Housing

Twice as abrasion resistant (300 BHN) as ductile iron. Top discharge design allows for superior motor cooling and slim profile for fitting tight spaces

Heavy Duty Ball Bearings

Double shielded grease lube bearings designed to extend bearing life under heavier specific gravity slurries

Dual Mechanical Seals (Sic x 2)

Abrasion resistant Silicon Carbide seals in separate oil chamber to protect the motor

Optional Seal Minder® Moisture Detection System

Provides early warning to protect motor

Shaft Sleeve

Easily replaceable, saves on shaft wear and prevents solids migration into seal chamber

Hardened Ductile Iron Volute

Hardened ductile iron (300 BHN) volute is standard. Optional coatings are available to extend the volute life under severely abrasive services

Chrome Iron Impeller

28% chrome iron slurry type semi-open impeller design to handle the most abrasive slurries

Chrome Iron Wear Plate


28% high chrome iron replaceable wear plate. Will keep pump performance like new longer, under the most demanding applications

Chrome Iron Agitator


28% high chrome iron hard metal agitator. Designed to agitate settled solids for easier pumping and removal

Large Open Strainer/Stand

Keeps pump suction off the bottom to allow agitation of solids and protects pump inlet from larger solids that could block the impeller

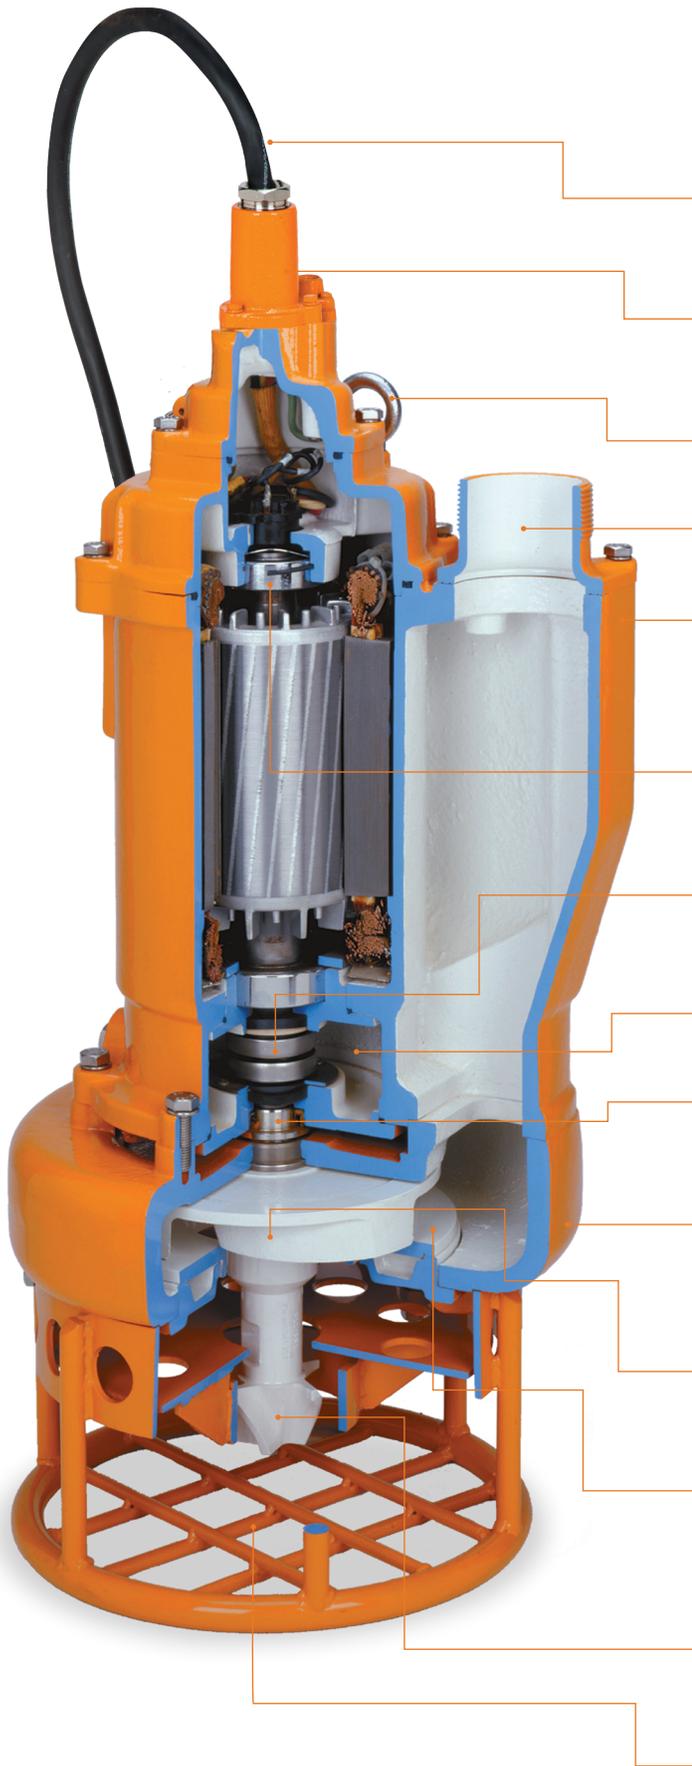

Every KZN slurry pump is constructed with an abrasive resistant 28% chrome iron (600 Brinell, 57 Rockwell C) impeller, wear plate & agitator.

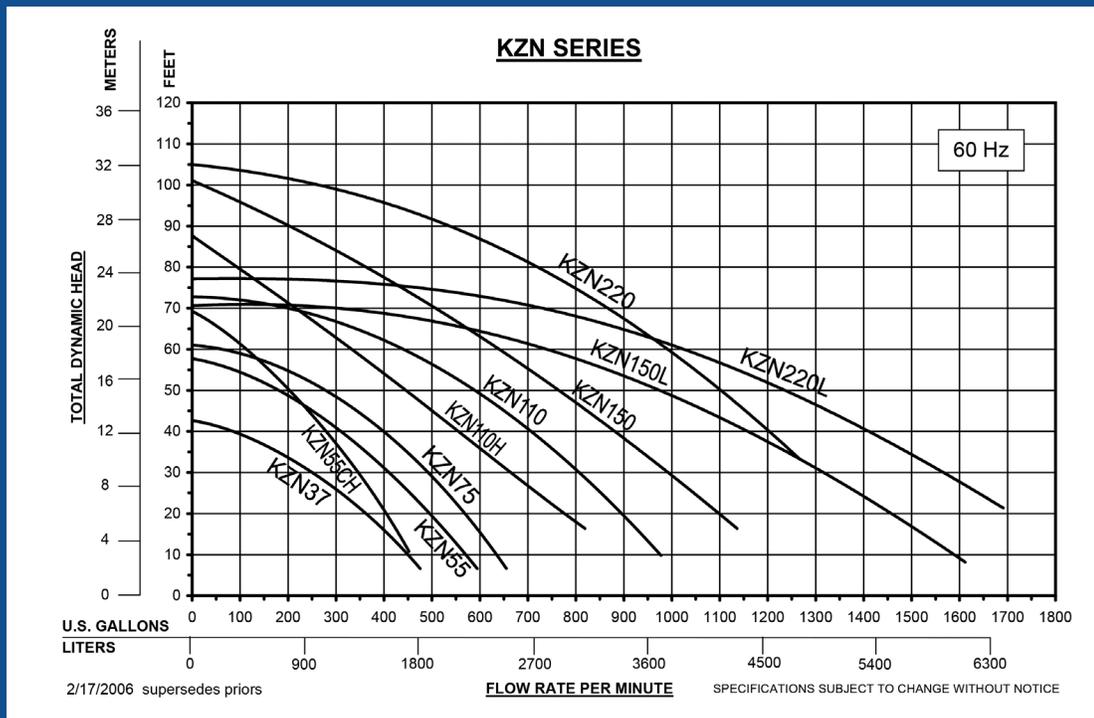

MODEL	DISCH. SIZE	H.P.	VOLT	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	HEIGHT	WIDTH	PUMP WEIGHT LBS	EST SHIP WEIGHT LBS
KZN37	3"	5	230/460	17/8.5	7/8"	42'	475	32.3"	16.5"	319	380
KZN55	4"	7.5	230/460	19.5/9.5	1"	57'	594	32.3"	16.5"	332	385
KZN55CH	3"	7.5	230/460	19.5/9.5	1"	69'	449	32.3"	17.25"	367	420
KZN75	4"	10	460	13	1"	61'	655	33.0"	16.5"	344	410
KZN110	6"	15	460	17.5	1 3/8"	72'	977	43.3"	21.5"	563	667
KZN110H	4"	15	460	17.5	1 3/8"	87'	819	43.3"	21.5"	576	680
KZN150	6"	20	460	26	1 1/2"	101'	1136	45.0"	21.5"	576	680
KZN150L	6"	20	460	26	1 1/2"	70'	1611	45.0"	21.5"	576	680
KZN220	6"	30	460	39	1 1/2"	105'	1268	52.2"	22.75"	1144	1275
KZN220L	6"	30	460	39	1 1/2"	77'	1690	52.2"	22.75"	1144	1275

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



**INDUSTRIAL
FLOW
SOLUTIONS™**

104 John W Murphy Drive
New Haven, CT 06513

Tel: (860) 399-5937

Fax: (860) 399-7784

Web: www.flowsolutions.com

Distributor: