


Fluid Transfer Carts (FTC) • How to Order

- Fluid Transfer Cart (FTC) includes:**
- Pump with Internal Bypass Valve
 - Gear Reducer
 - Motor mounted on a 2-Wheel Cart
 - AC units include 50 feet of power cord

- Bypass Valve allows pump to go into recirculation when discharge nozzle is closed.
- Gear reducer selected determines the pump speed and flow rate.
- Inlet & Outlet Connections are fitted with 1.5" or 2" Male Camlock fittings for quick-connection to hoses.
- 115V Single-phase units include 50 ft. of power cord with 3-prong 115V plug.

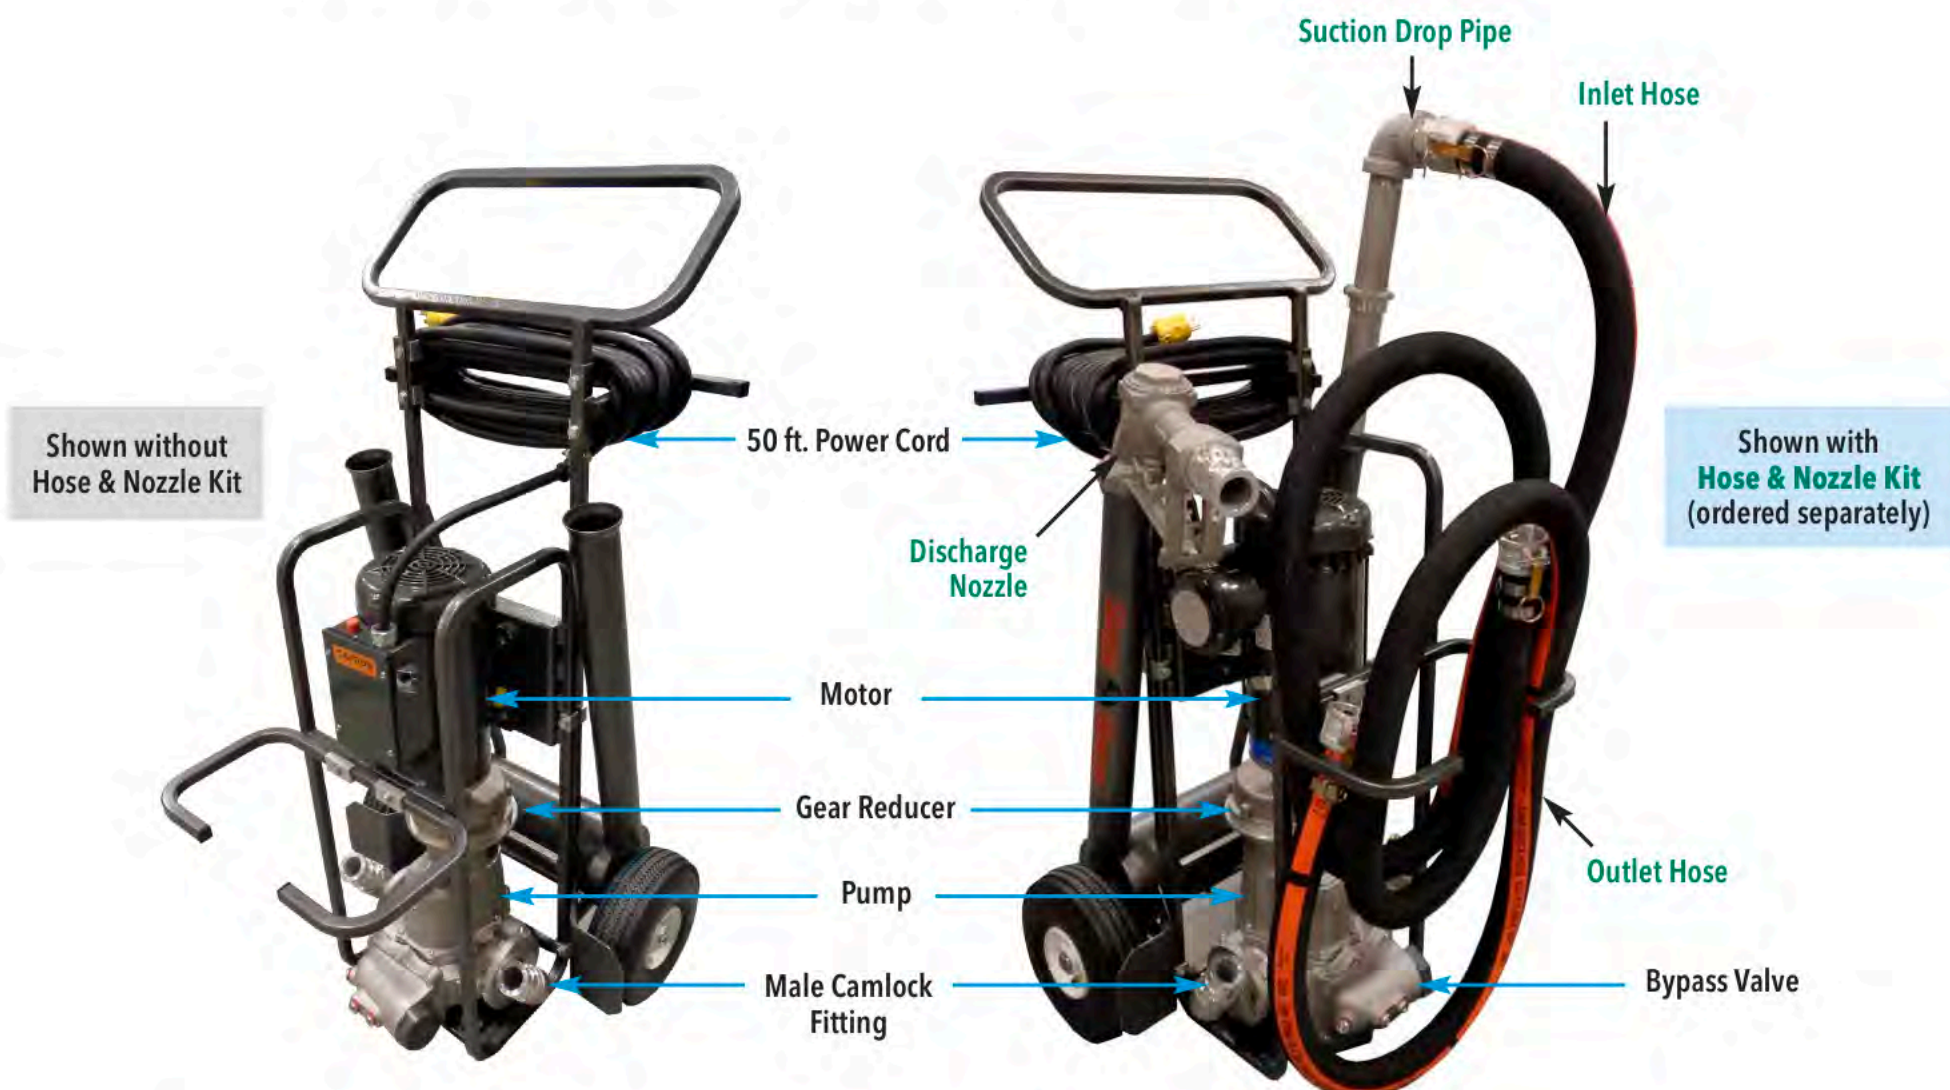

HOSE & NOZZLE Kit Includes:

Kit Order #: 95-15050

- (1) 10 ft. Outlet Hose
- (1) 10 ft. Inlet Hose
- (1) Manual Discharge Nozzle w/ 1.5" Male Camlock Fitting
- (1) 3 ft. Suction Drop Pipe w/ 1.5" Male Camlock Fitting



Individual Item Prices when sold separately:

- 1 Inlet (suction) Hose with Female Camlock fittings: (available in 10, 20 and 30 ft. lengths)
- 2 Outlet (discharge) Hose with Female Camlock fittings: (available in 10, 20 and 30 ft. lengths)
- 3 Manual discharge nozzle: (with 1.5" Male Camlock fitting) Suitable for filling totes and containers.
- 4 Suction drop pipe with Bung Adapter: (1.5" Male Camlock fitting) Connects to hose end for emptying container

FTC - FTS150 & FTS200 Pumps Mounted on a 2-Wheel Cart

Single Phase • AC Motor
Non-Explosion Proof

Fluid Transfer Cart (FTC) includes:

- Pump with Internal Bypass Valve
- Gear Reducer
- Motor mounted on a 2-Wheel Cart
- AC units include 50 feet of power cord
- Includes plug on 115V units
- DC units include 21 feet of power cord

Shown without
Hose & Nozzle Kit



Shown with
Hose & Nozzle Kit
(ordered separately)



Single Phase • AC Motor

* With Dual-Voltage Motor, these models will operate on 115V or 230V.

Pump Size	Flow (GPM)	Bypass Pressure (PSI)	HP	Volts/Amps	Model Code	Gear Ratio	Pump Speed (RPM)	Max Pressure		
								3.5 cSt	1,500 cSt	
1.5" PUMP	55	20	1.5 (HP)	115V / 12.0A 230V / 6.0A	15AB25AC1A015N-4XB01*	2.5 : 1	690	29	C.F.	Works with 115V Outlet
	45	20			15AB30AC1A015N-4XB01*	3 : 1	560	42	26	
	35	20			15AB40AC1A015N-4XB01*	4 : 1	430	59	46	
	30	50			15AD40AC1A015N-4XB01*	4 : 1	430	59	C.F.	
	40	50	2.0 (HP)	115V / 18.8A 230V / 9.4A	15AD30AC1A020N-4XB01*	3 : 1	560	59	C.F.	
	30	75			15AE40AC1A020N-4XB01*	4 : 1	430	83	C.F.	
	65	50	3.0 (HP)	230V / 12.80A	15AD20AC1C030N-4XB01	2 : 1	840	52	C.F.	
	55	50			15AD25AC1C030N-4XB01	2.5 : 1	700	68	51	
	45	75			15AE30AC1C030N-4XB01	3 : 1	560	91	75	
	30	100			15AF40AC1C030N-4XB01	4 : 1	430	127	113	
2.0" PUMP	55	20	1.5 (HP)	115V / 12.0A 230V / 6.0A	20AB40AC1A015N-4XB01*	4 : 1	430	29	26	115V Outlet
	70	20	2.0 (HP)	115V / 18.8A 230V / 9.4A	20AB30AC1A020N-4XB01*	3 : 1	560	30	25	
	55	20			20AB40AC1A020N-4XB01*	4 : 1	430	43	41	
	90	20	3.0 (HP)	230V / 12.8A	20AB25AC1C030N-4XB01	2.5 : 1	700	37	28	
	70	20			20AB30AC1C030N-4XB01	3 : 1	580	49	44	
	55	50			20AD40AC1C030N-4XB01	4 : 1	430	68	69	

Hoses, Nozzle & Suction Drop Pipes are sold as a Kit or purchased separately.

Fluid Transfer Carts (FTC) • Model Code Selection

FTC - FTS150 & FTS200 Pumps Mounted on a 2-Wheel Cart

Single-Phase • AC Motor

DC • 12 & 24V Motors

Explosion Proof

Fluid Transfer Cart (FTC) includes:

- Pump with Internal Bypass Valve
- Gear Reducer
- Motor mounted on a 2-Wheel Cart
- AC units include 50 feet of power cord
- DC units include 21 feet of power cord

Single Phase • AC Motor • Explosion-Proof All Models are Dual-Voltage and will operate on 115V or 230V.

Pump Size	Flow (GPM)	Bypass Pressure (PSI)	HP	Volts/Amps	Model Code	Gear Ratio	Pump Speed (RPM)	Max Pressure	
								3.5 cSt	1,500 cSt
1.5" PUMP	55	20	1.5 (HP)	115V / 12.4A 230V / 6.2A	15AB25AC1A015X-4XB01	2.5 : 1	690	28	C.F.
	45	20			15AB30AC1A015X-4XB01	3 : 1	560	39	23
	30	50			15AD40AC1A015X-4XB01	4 : 1	430	62	C.F.
	55	20	2.0 (HP)	115V / 22.2A 230V / 11.0A	15AB25AC1A020X-4XB01	2.5 : 1	690	42	24
	40	50			15AD30AC1A020X-4XB01	3 : 1	560	56	C.F.
	30	75			15AE40AC1A020X-4XB01	4 : 1	430	85	C.F.
	70	20	3.0 (HP)	115V / 30.0A 230V / 15.0A	15AB20AC1A030X-4XB01	2 : 1	840	48	29
	50	50			15AD25AC1A030X-4XB01	2.5 : 1	700	69	52
	40	75			15AE30AC1A030X-4XB01	3 : 1	560	92	76
25	100	15AF40AC1A030X-4XB01			4 : 1	430	132	118	
2.0" PUMP	50	20	1.5 (HP)	115V / 12.4A 230V / 6.2A	20AB40AC1A015X-4XB01	4 : 1	430	30	28
	75	20	2.0 (HP)	115V / 30.0A 230V / 15.0A	20AB30AC1A020X-4XB01	3 : 1	560	28	23
	50	20			20AB40AC1A020X-4XB01	4 : 1	430	44	43
	70	50	3.0 (HP)	115V / 30.0A 230V / 15.0A	20AD30AC1A030X-4XB01	3 : 1	560	50	C.F.
	50	50			20AD40AC1A030X-4XB01	4 : 1	430	50	73

Hoses, Nozzle & Suction Drop Pipes are sold as a **Kit** or purchased separately.

DC • 12 & 24 Volt Motors • Explosion-Proof

Pump Size	Flow (GPM)	Bypass Pressure (PSI)	HP	Volts/Amps	Model Code	Gear Ratio	Pump Speed (RPM)
1.5"	55	20	1.0	12V / 90A 24V / 40A	15AB40DC1A010X-4XB01	4 : 1	430
					15AB40DC2A010X-4XB01		

Hoses, Nozzle & Suction Drop Pipes are sold as a **Kit** or purchased separately.